

3. FTP - File Transfer Protocol

Prompt

- We should specify id address so that ftp will be opened
- ~~On which~~ On this ftp prompt we ~~can~~ get (or) transfer files
- get file
- put file
- After transferring or getting we can come out of the ftp prompt by specifying quit

diff
arrays

m dd
rm


Unit-II

Shell Programming

Shell:

- shell may start with \$ (or) #
- Shell is a command interpreter which converts line by line.
- Kernel internally interacts with hardware which manages memory.

• shell programs are called as shell scripts

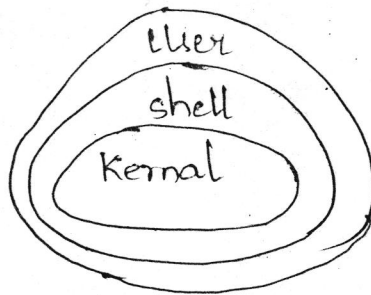

• There are 4 types of shells

1. Bourne shell (bsb)

path is : home directory / bin / bsb

2. C shell (csh)

home directory / bin / csh

3. Korn shell (ksh)

home directory / bin / ksh

4. Bourne again (or) bash shell

home dir / bin / bash

- bash is a combination of Bourne and Korn shell.
- C shell is better than all shells

* Pipes and I/O redirection

ls | wc

↳
pipe